

TILBEHØR



TILBEHØR
NIKKELLIDSE

OVERVIEW:

CABLE TYPE

Glass fibre insulated nickel plated copper wire.

GENERAL DESCRIPTION

Nickel plated copper wire conductors insulated with lapped glass yarn and braided glass yarn, consolidated with silicone varnish.


RELEVANT STANDARDS

General purpose - internal Heatsense specification.

Heatsense Part Number	Conductor C.S.A (mm ²)	Equivalent AWG Size (approx.)	Conductor Stranding (mm)	Conductor Diameter (mm) Nominal	Overall Diameter (mm) Nominal	Current Rating (A) Maximum *	Conductor Resistance (Ω/Km Nom)
HSV24NBJ.	0.22	24	07/0.200	0.60	1.50	12	82.0
HSV22NFJ.	0.50	22	16/0.200	0.93	1.83	16	36.0
HSV20NGJ.	0.75	20	24/0.200	1.14	2.04	23	24.0
HSV18NJ.	1.00	18	32/0.200	1.40	2.30	26	18.0
HSV16NHJ.	1.50	16	30/0.250	1.60	2.50	35	12.3
HSV14NKJ.	2.50	14	50/0.250	2.00	2.90	50	7.40
HSV12NLJ.	4.00	12	56/0.300	2.60	3.50	69	4.60
HSV10NNJ.	6.00	10	84/0.300	3.10	4.40	93	3.00
HSV08NMJ.	10.0	8	80/0.400	4.20	5.80	137	1.80

* BASED ON A 40°C AMBIENT TEMPERATURE WITH 110°C CONDUCTOR RISE DUE TO CURRENT ONLY

Standard colour is White (natural). Colours or identification tracers are available on request.



CABLE CHARACTERISTICS:

VOLTAGE RATING:

240V RMS

TEMPERATURE RATING:

-75C to + 260C

TYPICAL APPLICATIONS:

GENERAL HIGH TEMPERATURE LOW VOLTAGE APPLICATIONS, OVENS, KILNS, HARSH INDUSTRIAL ENVIRONMENTS.

Information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of products, no warranty is given nor is implied with respect to such information. Users should make their own enquiries to determine the suitability of products for any particular use. Freedom under patents, copyright and registered designs cannot be assumed. This design may be subject to change without notification - please check this data sheet is still current.

OVERVIEW:

CABLE TYPE

400C glass fibre insulated pure nickel 205 wire.

GENERAL DESCRIPTION

Pure nickel 205 wire conductors insulated with lapped glass yarn and braided glass yarn, consolidated with silicone varnish.


RELEVANT STANDARDS

General purpose - internal Heatsense specification.

Heatsense Part Number	Conductor C.S.A (mm ²)	Equivalent AWG Size (aprox.)	Conductor Stranding (mm)	Conductor Diameter (mm) Nominal	Overall Diameter (mm) Nominal	Current Rating (A) Maximum *	Conductor Resistance (Ω/Km Nom)
HSV24GBJ.	0.22	24	07/0.200	0.60	1.50	4	432
HSV22GFJ.	0.50	22	16/0.200	0.93	1.83	7	189
HSV20GGJ.	0.75	20	24/0.200	1.14	2.04	10	126
HSV18GJJ.	1.00	18	32/0.200	1.40	2.30	11	94
HSV16GHJ.	1.50	16	30/0.250	1.60	2.50	15	64
HSV14GKJ.	2.50	14	50/0.250	2.00	2.90	22	38
HSV12GLJ.	4.00	12	56/0.300	2.60	3.50	30	24
HSV10GNJ.	6.00	10	84/0.300	3.10	4.40	40	16
HSV08GMJ.	10.0	8	80/0.400	4.20	5.80	61	9

* BASED ON A 40°C AMBIENT TEMPERATURE WITH 110°C CONDUCTOR RISE DUE TO CURRENT ONLY

Standard colour is White (natural). Colours or identification tracers are available on request.



CABLE CHARACTERISTICS:

VOLTAGE RATING:

240V RMS

TEMPERATURE RATING:

-75C to + 400C

TYPICAL APPLICATIONS:

GENERAL HIGH TEMPERATURE LOW VOLTAGE APPLICATIONS, OVENS, KILNS, HARSH INDUSTRIAL ENVIRONMENTS.

Information in this publication and otherwise supplied to users is based on our general experience and is given in good faith , but because of the many particular factors which are outside our knowledge which affect the use of products, no warranty is given nor is implied with respect to such information. Users should make their own enquiries to determine the suitability of products for any particular use. Freedom under patents, copyright and registered designs cannot be assumed. This design may be subject to change without notification - please check this data sheet is still current.

OVERVIEW:

CABLE TYPE

700C Glass fibre insulated pure nickel 205 wire.

GENERAL DESCRIPTION

Pure nickel 205 wire conductors insulated with lapped glass yarn and braided glass yarn, consolidated with silicone varnish.


RELEVANT STANDARDS

General purpose - internal Heatsense specification.

Heatsense Part Number	Conductor C.S.A (mm ²)	Equivalent AWG Size (approx.)	Conductor Stranding (mm)	Conductor Diameter (mm) Nominal	Overall Diameter (mm) Nominal	Current Rating (A) Maximum *	Conductor Resistance (Ω/Km Nom)
HSV24GBP.	0.22	24	07/0.200	0.60	1.50	4	432
HSV22GFP.	0.50	22	16/0.200	0.93	1.83	7	189
HSV20GGP.	0.75	20	24/0.200	1.14	2.04	10	126
HSV18GJP.	1.00	18	32/0.200	1.40	2.30	11	94
HSV16GHP.	1.50	16	30/0.250	1.60	2.50	15	64
HSV14GKP.	2.50	14	50/0.250	2.00	2.90	22	38
HSV12GLP.	4.00	12	56/0.300	2.60	3.50	30	24
HSV10GNP.	6.00	10	84/0.300	3.10	4.40	40	16
HSV08GMP.	10.0	8	80/0.400	4.20	5.80	61	9

* BASED ON A 40°C AMBIENT TEMPERATURE WITH 110°C CONDUCTOR RISE DUE TO CURRENT ONLY

Standard colour is White (natural). Colours or identification tracers are available on request.



CABLE CHARACTERISTICS:

VOLTAGE RATING:

240V RMS

TEMPERATURE RATING:

-75C to + 700C

TYPICAL APPLICATIONS:

GENERAL HIGH TEMPERATURE LOW VOLTAGE APPLICATIONS, OVENS, KILNS, HARSH INDUSTRIAL ENVIRONMENTS.

Information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of products, no warranty is given nor is implied with respect to such information. Users should make their own enquiries to determine the suitability of products for any particular use. Freedom under patents, copyright and registered designs cannot be assumed. This design may be subject to change without notification - please check this data sheet is still current.



ELVARME



VORES PRODUKTSORTIMENT INKLUDERER:




INTEMP +1250C



VARMEBESKYTTENDE PRODUKTER



VARMEKABEL HØJTEMP. 900C

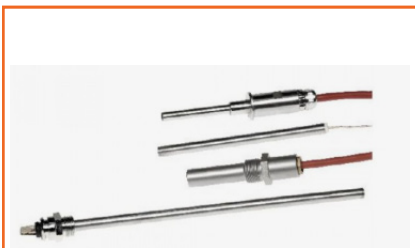

VARMEPATRONER



CERAMIC ELEMENTS

VI FØRER PRODUKTER INDENFOR KATEGORIERNE:



AUTOMATIK



**HVAC & BYGNINGS-
AUTOMATIK**



KØLEPROFILER



NEWTRONIC

Ove Jensens Alle 35 F
DK-8700 Horsens
Denmark
www.newtronic.eu
www.newtronic.dk
+45 7669 7090

