


**VARMEKABLER**

---

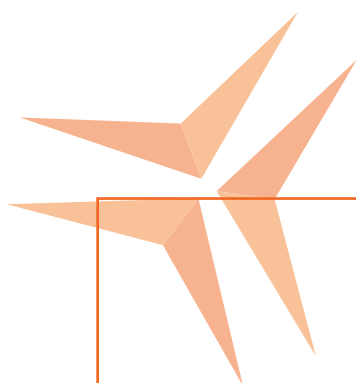

**VARMEKABEL  
CX**

# CX

The series heating cable Cx can be used in the most varied applications, from industrial and commercial refrigeration to domestic applications, etc. where it is necessary to maintain a certain temperature or to provide protection against the formation of ice.



It is supplied already cut to measure and ready to use: the cable length cannot be shortened by the end user. The cable is made up of a central heating part and two cold parts located on the cable ends so as to allow its electrical connection.

## GENERAL TECHNICAL FEATURES:

- Supply voltage: from 15V to 400V
- Power: from 5W/m to 300W/m
- Minimum bending radius: varies according to the kind of insulating material and diameter
- Operating temperatures: vary according to the kind of insulating material and according to table
- Length of heating and cold parts customizable on request
- It can be equipped with a metal or fibre glass braiding to ensure an additional mechanical protection
- Available certifications: EC
- Produced and tested according to the EN60335 standard.
- Compliance with the 2014/35/EU directive



# CX

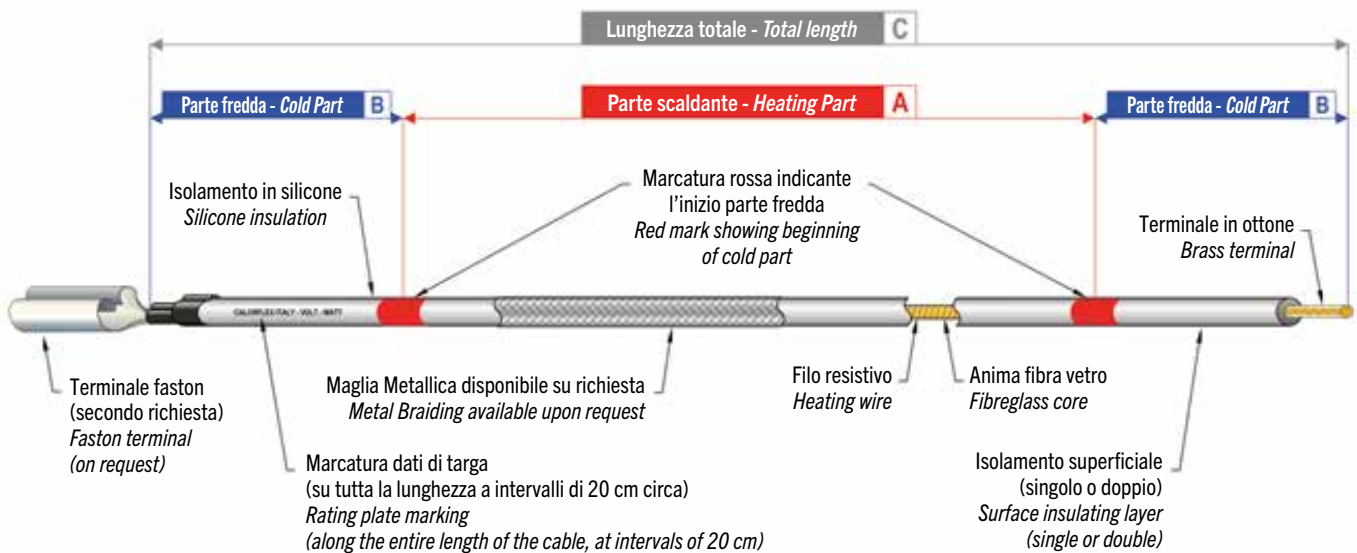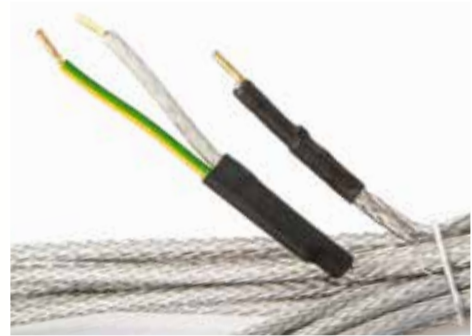

## AVAILABLE INSULATIONS

**PVC**

-20°C + 105°C

**POLYURETHANE**

-50°C + 90°C

**SILICONE**

-60°C + 200°C

**FIBREGLASS**

-60°C + 350°C

**FEP**

-100°C + 205°C

**PTFE**

-100°C + 260°C



**ELVARME**

## VORES PRODUKTSORTIMENT INKLUDERER:



**VARMEKABEL CDLx**



**FLEXCORD**




**VARMEKABEL STYRING**



**SPIRAL HEATERS**



**HIJD**

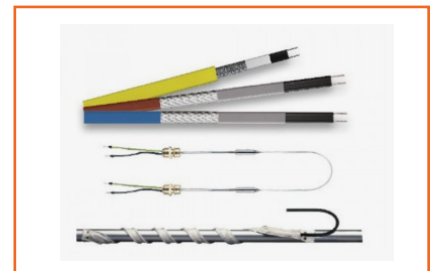

**VARMEKABLER**

## VI FØRER PRODUKTER INDENFOR KATEGORIERNE:



**AUTOMATIK**



**HVAC & BYGNINGS-  
AUTOMATIK**



**KØLEPROFILER**

**NEWTRONIC**

Ove Jensens Alle 35 F  
DK-8700 Horsens  
Denmark  
[www.newtronic.eu](http://www.newtronic.eu)  
[www.newtronic.dk](http://www.newtronic.dk)  
+45 7669 7090