

# nanodac

## Boiler Controller/Recorder

The ultimate in graphical recording combined with PID control

The nanodac™ Boiler Controller/Recorder offers the ultimate in graphical recording combined with PID control for a box of its size. The compact 1/4 DIN panel mount unit offers four high accuracy universal inputs for data recording and PID control. This secure data recording device with accurate control is enhanced by a full color, 1/4 VGA display to bring a crystal clear operator interface to even the smallest of process control needs.

### Crystal clear, color display

The 3.5" TFT display offers incredibly clear visualization of process parameters with a wide selection of configurable views to best suit the application.

Views include: Horizontal and vertical trends, Horizontal and vertical bar graphs, Numeric, Alarm panel, Alarm status, and control loops. The unit also provides user wiring from the front of the product for detailed configuration without the need to connect to a PC.

### Data Acquisition and Recording

The nanodac recording functionality utilizes the secure strategies and UHH format developed by Eurotherm through years of recording expertise. As well as multiple real-time views and historical review on the product, multiple data archiving strategies are provided utilizing the 50MB onboard Flash memory, removable USB and data transfer via FTP to a specified server.

The four standard universal input channels provide high accuracy and 125ms parallel sampling. An additional 30 virtual channels can be utilized to provide math, counter, slave communications and totalizer functionality all within the nanodac™ Boiler Controller/Recorder.

- One, Two or Three Element Control
- Onboard Secure Data Recording
- High Accuracy Analog Inputs (4 standard-max of 8)
- Multi-use USB Port
- Compact Design with UL Approval
- Built-in Web Server for Remote Connection
- Ethernet Communications
- Up to 30 Virtual Channels
- Multiple I/O Options
- Multi-language Support
- Free Programming Software
- 1/4 VGA Crystal Clear Display
- Simple 4 Button Operation
- Multiple Security Levels for Complete Ease of Use



**Eurotherm**®  
by **Schneider Electric**

## PID Control Loops

The nanodac instrument can also provide up to three independent control loops (optional). This control functionality utilizes the advanced Eurotherm PID algorithm providing high performance and reliability to your process. Functionality includes one of the best autotune facilities available along with overshoot inhibition (cutbacks); compensation for power fluctuations using power feedforward; linear, fan, oil and water cooling.

Often times processes need to vary the setpoint of the control process over a set period of time; this is achieved by using a set-point program. The nanodac offers an optional Dual Programmer supporting up to 100 programs locally, each program supporting 25 segments. The nanodac also provides remote access to a further 100 programs that can be easily retrieved via FTP or USB memory stick.

## Specification

### General

#### General

I/O types Analog i/p:	Four/eight
Digital i/p:	Two
Digital (logic) o/p:	Two max (see order code)
Relay o/p:	Four max (see order code)
DC output:	Three max (see order code)
Features:	Modbus TCP master/slave (optional) USB configuration save/restore Programmer (optional) Two control loops (optional) Zirconia probe support (optional) 30 Virtual channels (each configurable as counter, maths, totalizer or comms input) Sterilizer (optional) Relative humidity (optional) Customized start up screen EtherNet/IP*

#### Environmental performance

Ambient temperature range:	Operating: 0 to 55°C Storage: -20 to +70°C
Humidity range	Operating: 5% to 85% RH non condensing Storage: 5% to 85% RH non condensing
Protection:	Front panel: IP65
Front panel washdown:	IP66, NEMA 12 (International)
Behind panel:	IP10 (International)
Shock/Vibration: T	o BS EN61131-2 (5 to 150 Hz. at 1g; 1 octave per min.)
Altitude:	<2000 metres
Atmosphere:	Not suitable for use in explosive or corrosive atmospheres
Electrical safety:	BS EN61010-1 (Installation category II; Pollution degree 2)
Electromagnetic compatibility	
Emissions (Standard units):	BS EN61326 Class B – Light industrial
(Low voltage option):	BS EN61326 Class A – Heavy industrial
Immunity:	BS EN61326 Industrial

#### Other approvals and compliance details

General:	CE and cUL, EN61010
PV input:	AMS2750D compliant
RoHS EU;	China
Packaging:	BS61131-2 section 2.1.3.3.

#### Physical

Panel mounting:	1/4 DIN
Weight:	Instrument only: 0.44kg (15.52ozs)
Panel cutout dimension:	92 mm x 92 mm (both -0.0 +0.8) or 3.62 in x 3.62 in (both -0.00 +0.03 in)
Depth behind panel:	90 mm (3.54 in) excluding wiring

#### Operator interface

Display:	3.5" TFT color display (320 pixels wide x 240 pixels high)
Controls:	Four navigation pushbuttons below the display screen (Page, Scroll, Lower and Raise)

#### Power requirements

Supply voltage:	Standard: 100 to 230V ac $\pm$ 15% at 48 to 62Hz Low voltage: 24V ac (+10% -15%) at 48 to 62Hz, or 24V dc (+20% -15%)
Power dissipation:	9W (max.)
Fuse type:	No internal fuse fitted
Interrupt protection:	Standard: Holdup >10ms at 85V RMS supply voltage Low voltage: Holdup >10ms at 20.4V RMS supply voltage

#### Battery backup

Stored data:	Time, date
Replacement period:	Three years typical
Clock (real-time clock) data:	
Support time:	Minimum of 1 year with unit unpowered
Temperature stability:	0 to 55°C $\leq$ ±3.5ppm
RTC Aging:	First year to 10 year $\leq$ ± 5ppm
Type:	Poly-carbonmonofluoride/lithium (BR2330) (PA260195)

Replace battery with Panasonic BR2330/BE only. Use of another battery may present a risk of fire or explosion. See owners manual for safety instructions.

**Caution** Battery may explode if mistreated. Do not recharge, disassemble or dispose of in fire.

#### Ethernet communications

Type:	10/100baseT Ethernet (IEEE802.3)
Protocols:	Modbus TCP/IP master/slave, EtherNet/IP client/server
Cable type:	Category 5
Maximum length:	100metres (110 yards)
Termination:	RJ45. Green LED illuminated = link connected; Amber LED flashing shows link activity

#### USB port

Number of ports:	One at rear of instrument
Standard:	USB1.1
Transmission speeds:	1.5MBit/sec (low speed device)
Maximum current:	<100mA
Peripherals supported:	Memory stick (8GB max), Bar code reader, QWERTY keyboard

#### Update/Archive rates

Sample rate (input/output):	8Hz
Trend update:	8Hz max.
Archive sample value:	Latest value at archive time
Display value:	Latest value at display update time

### Analog Input

#### General

Number of Inputs:	Four/eight
Input types:	dc Volts, dc mV, dc mA, dual mA (external shunt required), dual mV, dual TC $\pm$ , Thermocouple, RTD (2-wire and 3-wire), Digital (Contact closure)
Input type mix:	Freely configurable Sample rate: 8Hz (125ms) 4Hz (250ms) if dual input enabled
Conversion method:	16 bit delta sigma
Input ranges:	See Table 1 and Table 2
Mains rejection (48 to 62Hz)	
Series mode:	> 95dB
Common mode:	>179dB
Common mode voltage:	250V ac max.
Series mode voltage:	280mV at lowest range; 5V peak to peak at highest range
Input Impedance:	40mV, 80mV, 2V ranges > 100M $\Omega$ ; 62.5k $\Omega$ for input voltages > 5.6V 667k $\Omega$ for input ranges < 5.6V
Overvoltage protection	
Continuous:	$\pm$ 30V RMS
Transient (<1ms):	$\pm$ 200V pk-pk between terminals
Sensor break detection Type:	ac sensor break on each input giving quick response with no associated dc errors
Recognition time:	<3 seconds
Minimum break resistance:	40mV, 80mV ranges: 5k $\Omega$ ; other ranges: 12.5k $\Omega$
Shunt (mA inputs only):	1 $\Omega$ to 1K $\Omega$ mounted externally
additional error due to shunt:	0.1% of Input

Isolation:

Channel to Channel: 300V RMS or dc (Double insulation)  
**Note:** If Dual Channel mode enabled primary and secondary inputs are not electrically isolated from each other.

Channel to common electronics: 300V RMS or dc (Double insulation)

Channel to ground: 300V RMS or dc (Double insulation)

Dielectric strength Test: BS EN61010, 1 minute type test

Channel to Channel: 2500V ac

Channel to Ground: 1500V ac

Low Range	High Range	Resolution	Maximum error (Instrument at 25°C)	Temperature Performance
-40mV	40mV	1.9µV	4.6µV + 0.053% of reading	13ppm of input per °C
-80mV	80mV	3.2µV	7.5µV + 0.052% of reading	13ppm of input per °C
-2V	2V	82µV	420µV + 0.044% of reading	13ppm of input per °C
-3V	10V	500µV	1.5mV + 0.063% of reading	45ppm of input per °C

Table 1 Voltage input ranges

**Note:** Restricted to 2000mV if dual input mode enabled

**Resistance input ranges**

Temperature scale: ITS90

Types, ranges and accuracies: See Table 3

Maximum source current: 200µA

Pt100 figures Range: 0 to 400Ω (-200 to +850°C)

Resolution: 0.05°C

Calibration error: ±0.31°C ±0.023% of measurement in °C at 25°C ambient

Temperature coefficient: ±0.01°C/°C ±25ppm/°C measurement in °C from 25°C ambient

Measurement noise: 0.05°C peak-peak with 1.6s input filter

Linearity error: 0.0033% (best fit straight line)

Lead resistance: 0 to 22Ω matched lead resistances

Bulb current: 200µA nominal

Low Range	High Range	Resolution	Maximum error (Instrument at 25°C)	Temperature Performance
0Ω	400Ω	20mΩ	120mΩ + 0.023% of reading	25ppm of input per °C

Table 2 Ohms (RTD) input ranges

RTD Type	Overall range (°C)	Standard	Max. linearization error
Cu10	-20 to +400	General Electric Co.	0.02°C
Cu53	-70 to +200	RC21-4-1966	0.01°C
JPT100	-220 to +630	JIS C1604:1989	0.01°C
Ni100	-60 to + 250	DIN43760:1987	0.01°C
Ni120	-50 to +170	DIN43760:1987	0.01°C
Pt100	-200 to + 850	IEC751	0.01°C
Pt100A	-200 to + 600	Eurotherm Recorders SA	0.09°C

Table 3 RTD type details

**Thermocouple data**

Temperature scale: ITS90

CJC Types: Off, internal, external, remote.

Remote CJC source: Any input channel

Internal CJC error: <1°C max., with instrument at 25 °C

Internal CJC rejection ratio: 40:1 from 25°C

Upscale/downscale drive: High, low or none independently configurable for each channel's sensor break detection

Types, ranges and accuracies: See Table 4

T/C Type	Overall range (°C)	Standard	Max. linearization error
B	0 to +1820	IEC584.1	0 to 400°C = 1.7°C 400 to 1820°C = 0.03°C
C	0 to +2300	Hoskins	0.12°C
D	0 to +2495	Hoskins	0.08°C
E	-270 to +1000	IEC584.1	0.03°C
G2	0 to +2315	Hoskins	0.07°C
J	-210 to +1200	IEC584.1	0.02°C
K	-270 to +1372	IEC584.1	0.04°C
L	-200 to +900	DIN43710:1985 (to IPTS68)	0.02°C
N	-270 to +1300	IEC584.1	0.04°C
R	-50 to +1768	IEC584.1	0.04°C
S	-50 to +1768	IEC584.1	0.04°C
T	-270 to +400	IEC584.1	0.02°C
U	-200 to +600	DIN43710:1985	0.08°C
NiMo/NiCo	-50 to +1410	ASTM E1751-95	0.06°C
Platinel	0 to +1370	Engelhard	0.02°C
Mi/NiMo	0 to +1406	Ipsen	0.14°C
Pt20%Rh/Pt40%/Rh	0 to +1888	ASTM E1751-95	0.07°C

Table 4 Thermocouple types, ranges and accuracies

**Relay and Logic I/O**

O/P1, O/P2 and O/P3 logic I/O and relay specification

**Active (current on) current sourcing logic output (O/P1 or O/P2 only)**

Voltage o/p across terminals: +11V min.; +13V max.

Short circuit output current: 6mA min. (steady state); 44mA max. (switch current)

**Inactive (current off) current sourcing logic output (O/P1 or O/P2 only)**

Voltage output across terminals: 0V (min.); 300mV (max.)

Output source leakage current into short circuit: 0µA (min.); 100µA (max.)

**Active (current on) contact closure sourcing logic input (O/P1 only)**

Input current Input at 12V: 0mA (min.); 44mA (max.)  
 Input at 0V: 6mA min. (steady state); 44mA max. (switch current)

Open circuit input voltage: 11V (min.); 13V (max.)

Open circuit (inactive) resistance: 500Ω (min.); ∞ (max.)

Closed circuit (active) resistance: 0Ω (min.); 150Ω (max.)

**Relay contacts**

Contact switching power (resistive): Max. 2A at 230V RMS ±15%  
 Min. 100mA at 12V

Current through terminals: 2A

**Digital Inputs**

Dig InA and Dig InB contact closure logic input

**Contact closure**

Short circuit sensing current (source): 5.5mA (min.); 6.5mA (max.)

Open circuit (inactive) resistance: 600Ω (min.); ∞ (max.)

Closed circuit (active) resistance: 0Ω (min.); 300Ω (max.)

**DC Output (option)**

O/P1, O/P2, O/P3 DC analog outputs

**Current outputs (O/P1, O/P2 and O/P3)**

Output ranges: Configurable within 0 to 20mA

Load resistance: 500Ω max.

Calibration accuracy: <±100µA ±1% of reading

**Voltage outputs O/P3 only**

Voltage output across terminals: 0V (min.); 300mV (max.)

Output source leakage current into short circuit: 0µA (min.); 100µA (max.)


**General**


Isolation: 300V ac double insulated from instrument and other I/O

Resolution: >11 bits

Thermal drift: <100ppm/°C

\* Consult Factory  
 † Refer to Manual

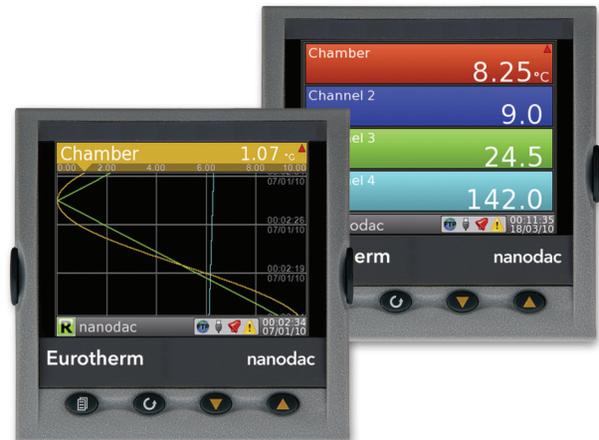

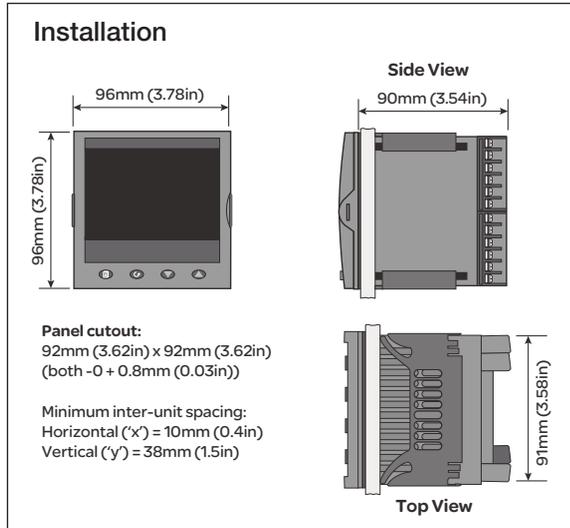

## Order Code

NANODAC	1	2	3	4	5	6	7
8	9	10	11	12	13	14	

Basic Product	
NANODAC	Graphical Recorder/Controller

1 Supply Voltage	
VH	100-230V ac ±15% at 48-62Hz
VL	24V ac (+10% -15%) at 48-62Hz, or 24V dc (+20% -15%)

2 Controller	
X	None (default)
C	2 Control loops
A	Advanced control loop (includes 2 control loops)

3 Programmer	
X	None (default)
P	Dual programmer

4 Output Options 1-2-3	
LRR	Logic/Relay/Relay (default)
LRD	Logic/Relay/Iso DC output
LLR	Logic/Logic/Relay
RDD	Relay/Iso DC/Iso DC
DDD	Iso DC/Iso DC/Iso DC
LDD	Logic/Iso DC/Iso DC

5 Application Blocks	
XX	None
ZC	Zirconia
RH	Humidity
ST	Sterilizer

6 Communications Protocol	
TS	Modbus TCP/IP slave (default)
TM	Modbus TCP/IP master
ES	EtherNet/IP* client/server
TE	Modbus TCP Master and EtherNet/IP*

7 Bezel	
SV	Silver (standard)
WD	Wash down front*

\* Consult Factory

8 Toolkit Blocks	
XXXX	None
BASIC	Basic toolkit blocks

9 Operating Language	
ENG	English (default)
FRA	French
GER	German
ITA	Italian
SPA	Spanish

10 OEM Security	
XXX	None
OEM	OEM Security enabled

11 Labels	
XXXXX	No custom labels

12 Special	
XXXXX	Default

13 Dual Input Channels	
XX	None
05	5 inputs enabled
06	6 inputs enabled
07	7 inputs enabled
08	8 inputs enabled

14 Dual Thermocouple Support	
XXX	None
TC	Dual T/C support enabled

**Eurotherm USA Headquarters**  
44621 Guilford Drive, Suite 100  
Ashburn, VA 20147, United States  
Phone: +1-703-724-7300  
Fax: +1-703-724-7301  
www.eurotherm.com



Scan for local contacts