


VARMEKABLER

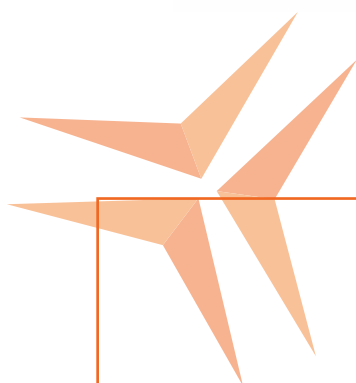

**VARMEKABEL
CFPX**

CFPX

The series heating cable CFPx is usually wound around the outer side of pipes to prevent the formation of ice in pipes and to keep the temperature up to 60°C. The special twin-lead structure allows it to better adhere to the surface on which it is installed, thus achieving a better heat exchange.


It is supplied already cut to measure and ready to use: the cable length cannot be shortened by the end user.

GENERAL TECHNICAL FEATURES:

- Supply voltage: from 1.5V to 400V
- Power: PVC from 5 to 20W/m; silicone from 5 to 80W/m
- External dimensions: 12x3,5mm ± 0,2mm
- Insulation: High temperature PVC; silicone
- Minimum bending radius: PVC 15mm; silicone 10mm
- Operating Temperature: PVC from -20°C to +105°C; silicone from -60°C to +200°C
- Length of heating and cold parts according to table or customizable on request
- Available certifications: EC
- Produced and tested according to the EN60335 standard. Compliance with the 2014/35/EU directive
- Different insulation materials, dimensions and powers may be produced on request and after a feasibility check is performed



CFPX

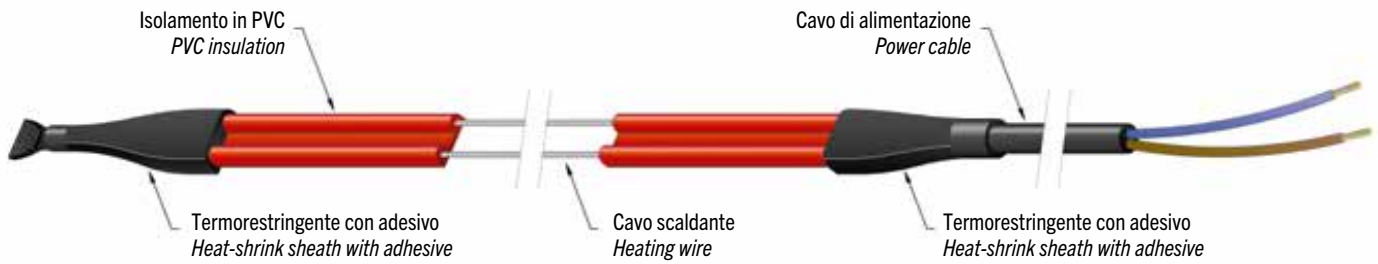

STANDARD MODELS AVAILABLE (SILICONE INSULATION)

SUPPLY VOLTAGE	20W/m	40W/m	HEATING PART MM	COLD PART MM	TOTAL LENGTH MM
220/240	20	40	1000	1000	2000
220/240	36	72	1800	1000	2800
220/240	54	108	2700	1000	3700
220/240	70	140	3500	1000	4500
220/240	92	184	4600	1000	5600
220/240	110	220	5500	1000	6500
220/240	130	260	6500	1000	7500
220/240	146	292	7300	1000	8300
220/240	182	364	9100	1000	10100
220/240	220	440	11000	1000	12000

Srl declines all liability for any damage caused to persons and/or property resulting from the improper use of the product. Consult the general terms of sale and use.

CAEX

STANDARD MODELS AVAILABLE (SILICONE INSULATION)

SUPPLY VOLTAGE-	15W/m	20W/m	HEATING PART MM	COLD PART MM	TOTAL LENGTH MM
220/240	30	40	2000	1000	3000
220/240	60	80	4000	1000	5000
220/240	90	120	6000	1000	7000
220/240	120	160	8000	1000	9000
220/240	150	200	10000	1000	11000
220/240	180	240	12000	1000	13000
220/240	210	280	14000	1000	15000
220/240	240	320	16000	1000	17000
220/240	270	360	18000	1000	19000
220/240	300	400	20000	1000	21000
220/240	375	500	25000	1000	26000
220/240	450	600	30000	1000	31000
220/240	525	700	35000	1000	36000
220/240	600	800	40000	1000	41000
220/240	675	900	45000	1000	46000
220/240	750	1000	50000	1000	51000
220/240	900	1200	60000	1000	61000
220/240	1050	1400	70000	1000	71000
220/240	1200	1600	80000	1000	81000
220/240	1350	1800	90000	1000	91000
220/240	1500	2000	100000	1000	101000



ELVARME



VORES PRODUKTSORTIMENT INKLUDERER:




VARMEKBAEL CNFx




VARMEKABEL STYRING



ELPATRONER

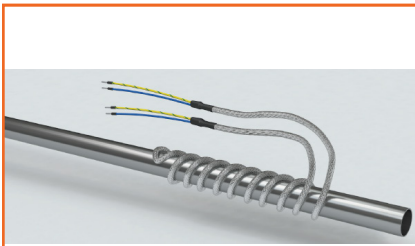

VARMEKABEL HØJTEMP. 450C

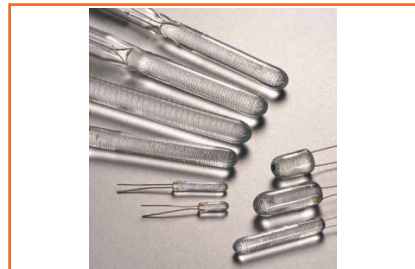

TEMPERATUR SENSORS



VARMEKABLER

VI FØRER PRODUKTER INDENFOR KATEGORIERNE:



AUTOMATIK



**HVAC & BYGNINGS-
AUTOMATIK**



KØLEPROFILER



NEWTRONIC

Ove Jensens Alle 35 F
DK-8700 Horsens
Denmark
www.newtronic.eu
www.newtronic.dk
+45 7669 7090

